


ZOOM LED PAR LIGHT
INSTRUCTION MANUAL

18PCS 12W 4 IN 1 RGBW

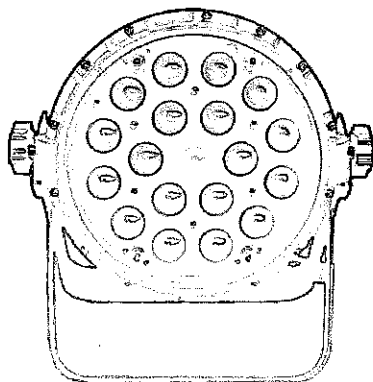

Please read this manual carefully before use!
Version: TX-LDWP18Z-4in1

1.Package

- 1.LED light 1PC
- 2.Instruction manual 1PC

2.Maintaining

1. The fixture should be kept dry to avoid working in wet conditions.
2. Intermittent use will effectively prolong the life of this fixture.
3. For a good ventilation and lighting effects, please clean the fans ,fan nets and lens usually .
4. To avoid damage this fixture, please don't use organic solvents to clean the fixture shell.

3.Precautions

1. In order to ensure the life of this fixture, please don't place this fixture where is moisture or leakage, and don't operate the fixture at temperatures higher than 40°please!
2. Don't place the fixture where is easy to lose or vibration-prone
3. To avoid risk of electric shock, please ask the professionals to maintain this fixture.
4. When connect the fixture to power, the changes of power voltage should be at-10% ~+10%,if higher, will reduce the life of the fixture, but if lower, will affect the lightness.
5. Should need 20 Min. to fully cool the light before re-use.
6. In order to ensure the normal use of this product, please read this manual carefully. Thank you very much for your cooperation.

4.Installation


Put the light on the ground and adjust it to a right angle.
Connect signal cable.Plug one end of the signal cable to the INPUT socket on the rear of the light.The other end into OUTPUT socket of DMX 512 controller.
Fit 1,2 and 3 of single socket.(1Ground,2 Data-,3 Data +)

5.Description of the light

- * Power supply: AC 110V/240V 50/60Hz, 180W switching power supply.
- * Light source: 18pcs 12W 4in1 RGBW LED
- * Lens Angle: 10-70°
- * Signal: DMX 512.Multi lights could be connected and work synchronously.
- * RGBWYP color changing system can create innumerable colors
- * Build-in program
- * Control: DMX512/Auto/Main-follow,Sound
- * Sound control with sensitivity adjustable
- * Fast zoom effect
- * LED display board to set the function
- * Housing: Extruded aluminum par housing,with sealed housing.
- * Waterproof: IP65
- * Application place: Disco, Nightclub, Party, outdoor show,quiet occasion,etc
- * Mounting: Handing up or fixing on the ground

6.Function code setting

1.Button: The function can be set at the control panel



MENU: to choose the running mode
UP and DOWN: to set the value or choose function
ENTER: to confirm the setting

2.Menu.

- A001-A512: 10 channel mode (Slave machine setting)
- D001-D512: 6 channel mode
- FF00-99: Gradual change
- EE00-99: Pulse change
- CC00-99: Jump change
- Soud: Sound control
- R000-255 To set the brightness of red color
- G000: 0-255 To set the brightness of green color
- B000: 0-255 To set the brightness of blue color
- U000:0-255 To set the brightness of white color
- n000:0-255 Zoom lens position

7. DMX channel: 9

Channel	Value		Description
CH1	0-255		Zoom
CH2	0-255		Whole dimmer
CH3	0-9	Empty	Strobe
	10-255	From slow to fast	
CH4	0-9	Dimmer	Function
	10-19	Red	
	20-29	Green	
	30-39	Blue	
	40-49	R-G	
	50-59	R-B	
	60-69	G-B	
	70-79	R-G-B	
	80-89	Orange	
	90-149	Gradual change	
	150-199	Pulse change	
	200-229	Jump change	
230-255	Sound control		
CH5	0-255	From slow to fast	Function speed
CH6	0-255	From faint to brightness	Red
CH7	0-255	From faint to brightness	Green
CH8	0-255	From faint to brightness	Blue
CH9	0-255	From faint to brightness	White

8. DMX channel: 5

Channel	Value	Description
CH1	0-255	Zoom
CH2	0-255	Red from faint to brightness
CH3	0-255	Green from faint to brightness
CH4	0-255	Blue from faint to brightness
CH5	0-255	White from faint to brightness