

WARNING

**FOR YOUR OWN SAFETY, PLEASE READ THIS USER MANUAL CAREFULLY
BEFORE YOUR INITIAL START-UP!**



CAUTION!

Keep this equipment away from rain,
moisture and liquids.



SAFETY INSTRUCTIONS

Every person involved with the installation, operation & maintenance of this equipment should:

- Be competent
- Follow the instructions of this manual



**CAUTION! TAKE CARE USING THIS EQUIPMENT!
HIGH VOLTAGE-RISK OF ELECTRIC SHOCK!!**



Before your initial start-up, please make sure that there is no damage caused during transportation. Should there be any, consult your dealer and do not use the equipment.

To maintain the equipment in good working condition and to ensure safe operation, it is necessary for the user to follow the safety instructions and warning notes written in this manual.

Please note that damages caused by user modifications to this equipment are not subject to warranty.

IMPORTANT:

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorized modification to the equipment.

- Never let the power-cable come into contact with other cables. Handle the power-cable and all mains voltage connections with particular caution!
- Never remove warning or informative labels from the equipment.
- Do not open the equipment and do not modify the equipment.
- Do not connect this equipment to a dimmer-pack.
- Do not switch the equipment on and off in short intervals, as this will reduce the systems life.
- Only use the equipment indoors.
- Do not expose to flammable sources, liquids or gases.
- Always disconnect the power from the mains when equipment is not in use or before cleaning! Only handle the power-cable by the plug. Never pull out the plug by pulling the power-cable.
- Make sure that the available voltage is 110-240v.
- Make sure that the power-cable is never crimped or damaged. Check the equipment and the power-cable periodically.
- If the equipment is dropped or damaged, disconnect the mains power supply immediately. Have a qualified engineer inspect the equipment before operating again.
- If the equipment has been exposed to drastic temperature fluctuation (e.g. after transportation), do not switch it on immediately. The arising condensation might damage the equipment. Leave the equipment switched off until it has reached room temperature.

Only use fuses of same type and rating.

- Repairs, servicing and power connection must only be carried out by a qualified technician. THIS UNIT CONTAINS NO USER SERVICEABLE PARTS.

OPERATING DETERMINATIONS

If this equipment is operated in any other way, than those described in this manual, the product may suffer damage and the warranty becomes void.

Incorrect operation may lead to danger e.g.: short-circuit, burns, electric shocks, lamp failure etc.

Do not endanger your own safety and the safety of others! Incorrect installation or use can cause serious damage to people and property.

You should find inside the LEDJ carton the following items:

1. 1X24LED Black Light
2. 1XPower Cord
3. 1XUser Manual

Technical Specifications:

DMX Channels: 7

Voltage: AC 110-240V ~ 50/60Hz



LED: 18PCSx3w UV LEDS

Operating modes:

- 1, Static color mode
- 2, Color changing mode
- 3, Color fade mode
- 4, Auto run mode
- 5, Sound active mode
- 6, Master/Slave mode
- 7, DMX mode

Digital display operate :

After starting press MANU enter into main-menu,
Press UP (on) DOWN (down) to select the submenu,
and then press ENTER ensure

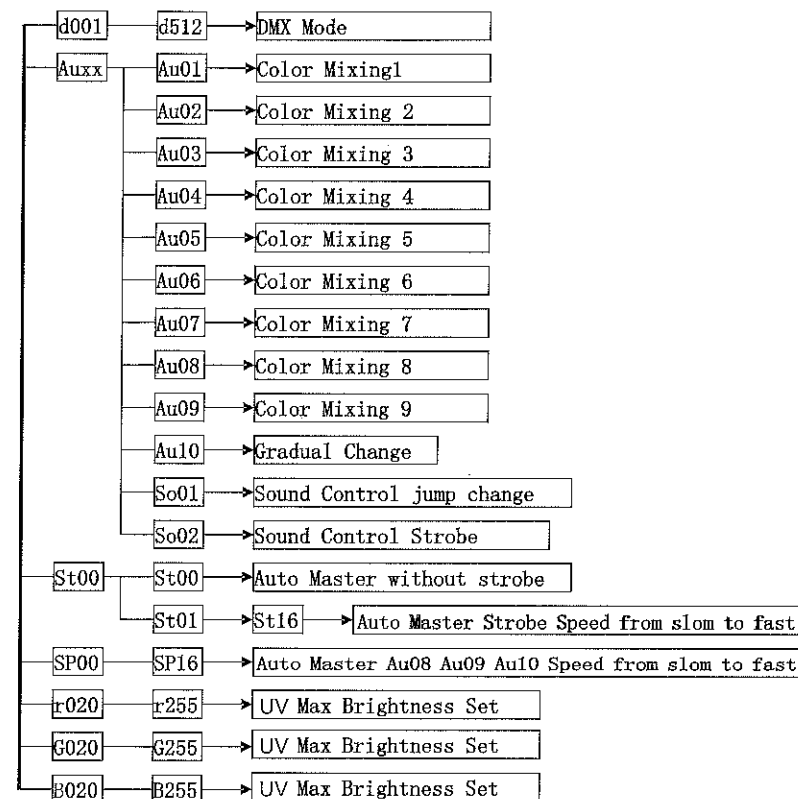

DMX512 Control Function:

| Channel | Channel Address | Function | Remark |
|---------|-----------------|-----------------------|-----------|
| CH1 | 0-255 | Dimmer | |
| CH2 | 0-255 | Strobe | |
| CH3 | 0-50 | Continuous Light | Auto-Play |
| | 51-100 | Hopping | |
| | 101-200 | Fade | |
| | 201-255 | Sound Activated | |
| CH4 | 0-255 | Speed +/- | |
| CH5 | r000-255 | Line 3 Brightness +/- | |
| CH6 | g000-255 | Line 2 Brightness +/- | |
| CH7 | b000-255 | Line 1 Brightness +/- | |

Notice:

- Be sure to follow figures 2 & 3 when making your own cables.
Do not connect the cable's shield conductor to the ground lug or allow the shield conductor to come in contact with the XLR's outer casing. Grounding the shield could cause a short circuit and erratic behaviour.

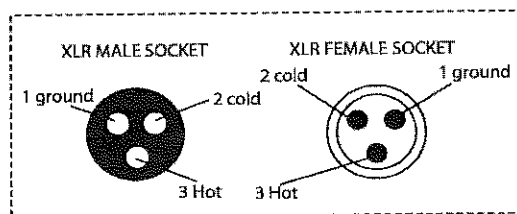




FIGURE 3

| XLR Pin Configuration |
|-----------------------|
| Pin 1 = Ground |
| Pin 2 = Negative |
| Pin 3 = Positive |

FIGURE 2

Special Note: Line termination:

- When longer runs of cable are used, you may need to use a terminator on the last unit to avoid erratic behaviour.



Termination reduces signal transmission problems and interference.
it is always advisable to connect a DMX terminal, (resistance 120 Ohm 1/4 W) between pin 2 (DMX-) and pin 3 (DMX+) of the last fixture.