

75	Blue15	000-255 0%-100%
76	White15	000-255 0%-100%
77	Amber15	000-255 0%-100%
78	Red16	000-255 0%-100%
79	Green16	000-255 0%-100%
80	Blue16	000-255 0%-100%
81	White16	000-255 0%-100%
82	Amber16	000-255 0%-100%
83	Red17	000-255 0%-100%
84	Green17	000-255 0%-100%
85	Blue17	000-255 0%-100%
86	White17	000-255 0%-100%
87	Amber17	000-255 0%-100%
88	Red18	000-255 0%-100%
89	Green18	000-255 0%-100%
90	Blue18	000-255 0%-100%
91	White18	000-255 0%-100%
92	Amber18	000-255 0%-100%
93	Color Chase	000-007 Manual 008-255 Color chase
94	Speed Control	000- 255 Color chase speed


Color Chase Table

Color Chase	000-007 No function
	008-022 Color Chase 01
	023-037 Color Chase 02
	038-052 Color Chase 03
	053-067 Color Chase 04
	068-082 Color Chase 05
	083-097 Color Chase 06
	098-112 Color Chase 07
	113-127 Color Chase 08
	128-142 Color Chase 09
	143-157 Color Chase 10
	158-172 Color Chase 11
	173-187 Color Chase 12
	188-202 Color Chase 13
	203-217 Color Chase 14
	218-232 Color Chase 15
	233-247 Color Chase 16
	248-255 Sound active

Specifications

Model: 18x5W RGBWA LED wall washer bar light - 18 sekci
LED: 18x5Watt RGBWA 5in1
Working Position: Any safe working position
Voltage: 100V/240V 50/60Hz
Power Draw: 70W
Casing: Aluminum
Net Weight: 2.1 Kg
Package Size: Dimensions: 1120(L) x 180 (W) x110 (H)mm
Colors: RGBWA color Mixing
DMX Channels: 9/94DMX channels
IP: IP20

Please Note: Specifications and improvements in the design of this unit and this manual are subject to change without any prior written notice.




FLASH

LED Wall Washer Bar Light
18X5W RGBWA 18 SEKCI
F7200207




User Instructions

1. KEY AND DISPLAY FUNCTIONS



A B C D

Display instruction

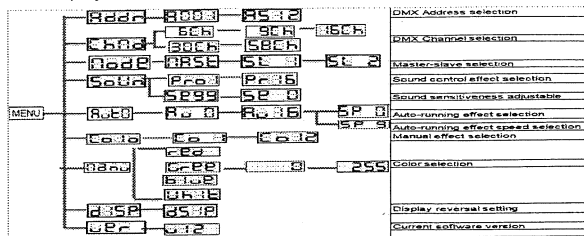

- A. Function
- B. +
- C. -
- D. Enter
- E. LCD Display

2. DMX CHANNELS INSTRUCTIONS:

Channel	Value	Function
1	ALL-Dimmer	000-255 0%- 100%
2	Strobe	000-008 Open
		009-255 Stroboscope (Speed 0 - 100%)
3	Red	000-255 0%-100%
4	Green	000-255 0%-100%
5	Blue	000-255 0%-100%
6	White	000-255 0%-100%
7	Amber	000-255 0%-100%
8	Color Chase	000-007 Manual
		008-255 Color chase
		000- 255 Color chase speed
9	Speed Control	000- 255 Color chase speed

76Channels

Channel	Value	Function
1	Dimmer	000-255 0%- 100%
2	Strobe	000-008 Open
		009-255 Stroboscope (Speed 0 - 100%)
3	Red1	000-255 0%-100%
4	Green1	000-255 0%-100%
5	Blue1	000-255 0%-100%
6	White1	000-255 0%-100%
7	Amber1	000-255 0%-100%
8	Red2	000-255 0%-100%
9	Green2	000-255 0%-100%
10	Blue2	000-255 0%-100%
11	White2	000-255 0%-100%

12	Amber2	000-255 0%-100%
13	Red3	000-255 0%-100%
14	Green3	000-255 0%-100%
15	Blue3	000-255 0%-100%
16	White3	000-255 0%-100%
17	Amber3	000-255 0%-100%
18	Red4	000-255 0%-100%
19	Green4	000-255 0%-100%
20	Blue4	000-255 0%-100%
21	White4	000-255 0%-100%
22	Amber4	000-255 0%-100%
23	Red5	000-255 0%-100%
24	Green5	000-255 0%-100%
25	Blue5	000-255 0%-100%
26	White5	000-255 0%-100%
27	Amber5	000-255 0%-100%
28	Red6	000-255 0%-100%
29	Green6	000-255 0%-100%
30	Blue6	000-255 0%-100%
31	White6	000-255 0%-100%
32	Amber6	000-255 0%-100%
33	Red7	000-255 0%-100%
34	Green7	000-255 0%-100%
35	Blue7	000-255 0%-100%
36	White7	000-255 0%-100%
37	Amber7	000-255 0%-100%
38	Red8	000-255 0%-100%
39	Green8	000-255 0%-100%
40	Blue8	000-255 0%-100%
41	White8	000-255 0%-100%
42	Amber8	000-255 0%-100%
43	Red9	000-255 0%-100%
44	Green9	000-255 0%-100%
45	Blue9	000-255 0%-100%
46	White9	000-255 0%-100%
47	Amber9	000-255 0%-100%
48	Red10	000-255 0%-100%
49	Green10	000-255 0%-100%
50	Blue10	000-255 0%-100%
51	White10	000-255 0%-100%
52	Amber10	000-255 0%-100%
53	Red11	000-255 0%-100%
54	Green11	000-255 0%-100%
55	Blue11	000-255 0%-100%
56	White11	000-255 0%-100%
57	Amber11	000-255 0%-100%
58	Red12	000-255 0%-100%
59	Green12	000-255 0%-100%
60	Blue12	000-255 0%-100%
61	White12	000-255 0%-100%
62	Amber12	000-255 0%-100%
63	Red13	000-255 0%-100%
64	Green13	000-255 0%-100%
65	Blue13	000-255 0%-100%
66	White13	000-255 0%-100%
67	Amber13	000-255 0%-100%
68	Red14	000-255 0%-100%
69	Green14	000-255 0%-100%
70	Blue14	000-255 0%-100%
71	White14	000-255 0%-100%
72	Amber14	000-255 0%-100%
73	Red15	000-255 0%-100%
74	Green15	000-255 0%-100%